Polyset ADVANCED MATERIALS FOR **PERFORMANCE**

PC-2520

UV Cationic Initiator

Technical Bulletin

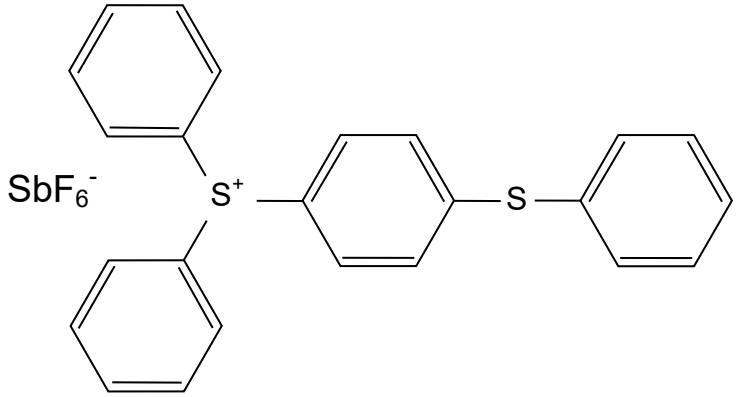

Polyset PC-2520 UV Cationic Photointiator is a highly efficient ultraviolet (UV) photoinitiator which offers fast cure speeds in epoxy, vinyl ether, and other cationically cured resin systems.

Key Features:

- Excellent stability in formulated products at room and elevated temperatures up to 70°C.
- Fast cure in the presence of air.
- No air inhibition during cure.

Typical Properties:

Appearance	White Powder
Melting Point	> 93°C (200°F)

Suggested Applications:

PC-2520 UV Cationic Photointiator is recommended for use in:

- Coatings/Overprint varnishes for metal, wood, paper, and plastics.
- Printing inks.
- Conformal Coatings, dielectric coatings

Limited Warranty: Polyset Company Inc. makes no warranty, expressed or implied, including any warranty of merchantability of fitness for a particular purpose. The sole remedy of Purchaser for any claim concerning this product, including, but not limited to, claims alleging breach of warranty, negligence, strict liability or otherwise, is the replacement of product or refund of the purchase price, at the discretion of Polyset Company Inc. Any claims concerning this product shall be submitted in writing within one year of the delivery date of this product to Purchaser and any claims not presented within that period are waived by Purchaser. IN NO EVENT SHALL POLYSET COMPANY INC. BE LIABLE FOR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL (INCLUDES LOSS OF PROFITS) OR PUNITIVE DAMAGES. Copyright © 2014 Polyset Company, Inc. All rights reserved. Revised 7/8/2014

65 Hudson Ave | PO Box 111
Mechanicville, NY 12118

(518) 664-6000
info@polyset.com

polyset.com