




# Ply-Krete® LV

## Technical Bulletin

Ply-Krete® LV is low-viscosity, two-component, moisture insensitive, 100% solid, elastomeric concrete. It is designed as an expansion joint header to preserve and protect concrete decks and substructures by preventing water absorption and minimizing chloride intrusion. Ply-Krete® LV is a fast-setting elastomeric concrete with high, early strengths to help ensure a quick return of traffic.

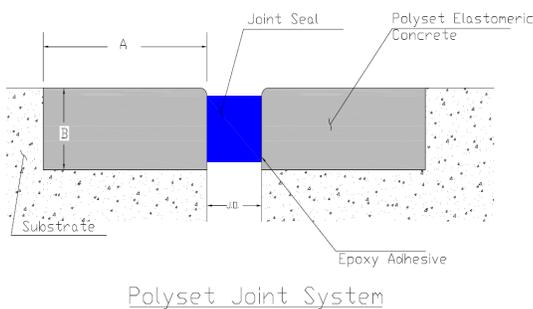

### Key Features

- Low viscosity for easier mixing
- Fast setting
- Moisture insensitive
- High abrasion resistance
- Excellent load bearing characteristics
- Excellent thermal shock resistance
- Excellent adhesion to various substrates
- Excellent impact resistance
- Waterproof and chemical resistant
- Resistant to UV and ozone exposure
- Resistant to freeze-thaw changes

### Other Applications

- Patching concrete and asphalt
- Railroad crossings
- Warehouse floors
- Waterproof protective membrane coating
- Skid resistant overlay for bridge decks & other structures

**Shelf Life:** Two years in the original, unopened containers

**Storage:** Store between 60-100°F

### Physical Data

Appearance @ 25°C			
	Part "A"	Part "B"	Mixed
Packaging	1 Can	1 Can	With 1 Bag Agg
Color	Straw	Black	Black
Viscosity, cps	700 ± 200	1200 ± 300	-
Wt./gal., lb	9.3 ± 0.2	9.3 ± 0.2	-
Yield	-	-	0.52 ft <sup>3</sup>

Ratio & Cure			
Mix Ratio	1 Part "A"	1 Part "B"	By Volume
	100 "A"	100 "B"	By Weight
<i>Mix A &amp; B well, then add supplied aggregate</i>			
Cure	Gel Time @ 25°C		15-25 Min.
Initial Cure	1-3 Hrs	Less if Aggregate is Preheated	

Strengths with Aggregate (Aggregate Type Affects Results)		
Compressive Strength, psi	5,000 Min.	ASTM D695
Resilience @ 5% Dfl	95% Min.	ASTM C579
Brittleness ± 1 ft-lb	10 ft-lb Min.	Ball Drop

Strengths with Binder Only		
Percent Elongation	50 Min.	ASTM D638
Tensile Strength, psi	1450 Min.	ASTM D638
Tear Strength, pli	275 Min.	ASTM D624
Shore D Hardness	60 Min.	ASTM D2240
Bond Strength To Dry Concrete To Wet Concrete	500 psi 275 psi	ASTM D624

For installation instructions, please refer to the "Elastomeric Concrete Installation Instructions Technical Bulletin". For health and safety information, please refer to the MSDS. **KEEP OUT OF REACH OF CHILDREN.**

PC2634

**Limited Warranty:** Polyset Company Inc. makes no warranty, expressed or implied, including any warranty of merchantability of fitness for a particular purpose. The sole remedy of Purchaser for any claim concerning this product, including, but not limited to, claims alleging breach of warranty, negligence, strict liability or otherwise, is the replacement of product or refund of the purchase price, at the discretion of Polyset Company Inc. Any claims concerning this product shall be submitted in writing within one year of the delivery date of this product to Purchaser and any claims not presented within that period are waived by Purchaser. IN NO EVENT SHALL POLYSET COMPANY INC. BE LIABLE FOR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL (INCLUDES LOSS OF PROFITS) OR PUNITIVE DAMAGES. Copyright © 2016 Polyset Company, Inc. All rights reserved. Revised 8/16.