


Ply-Seal® Color Match Joint System

Technical Bulletin

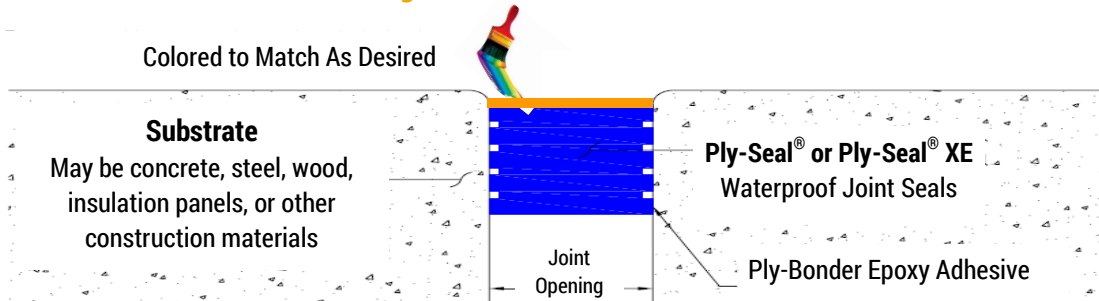

Ply-Seal® Color Match is an aesthetic top coat that is a fast-setting, flexible, protective, acrylic elastomeric coating that is resistant to weathering, oxidation, UV, salt, and other materials that may come in contact with the product. This is an ideal seal coating for vertical and overhead applications in commercial buildings, parking garages, stadiums, plazas, and other structures where a waterproof joint seal is required. Architects will enjoy the ease of matching colors and conformity to existing conditions regardless of contours, joint size, or intersections.

Key Features


- High flexibility
- Quick drying
- Excellent exterior durability
- Acrylic base for easy cleanup
- Available in most pastel colors

Physical Data

Physical Properties of Color Match	
Vehicle	Pure 100% Acrylic
Volume Solids	50%
Minimum Dry Film Thickness	5 Mils
Colors (Submit a Match Sample)	Most Colors Available
Applied Wet Film Thickness	10 Mils
Applied Coverage	136 Sq. Ft./Gallon
Drying Time (70°F; 50% R.H.)	1 Hr. Touch, 4 Hrs. Topcoat
Min. Application Temperature	Air/Material/Surface: 50°F
V.O.C. Content	Less than 150 Grams/Liter

Application

Stir well prior to field application. Apply to a clean, dry surface; do not thin. The minimum application temperature is 50°F and the maximum service temperature is 180°F. Apply with a quality brush or roller at 136 sq. ft./gallon. Clean up with warm soapy water.

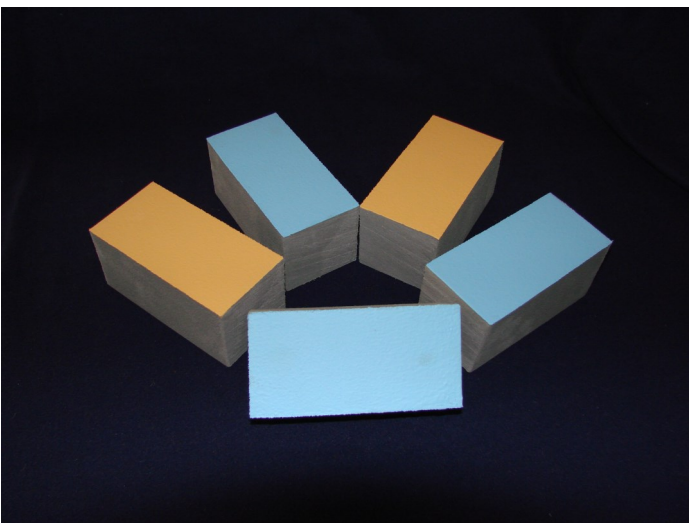

Limited Warranty: Polyset Company Inc. makes no warranty, expressed or implied, including any warranty of merchantability of fitness for a particular purpose. The sole remedy of Purchaser for any claim concerning this product, including, but not limited to, claims alleging breach of warranty, negligence, strict liability or otherwise, is the replacement of product or refund of the purchase price, at the discretion of Polyset Company Inc. Any claims concerning this product shall be submitted in writing within one year of the delivery date of this product to Purchaser and any claims not presented within that period are waived by Purchaser. IN NO EVENT SHALL POLYSET COMPANY INC. BE LIABLE FOR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL (INCLUDES LOSS OF PROFITS) OR PUNITIVE DAMAGES. Copyright © 2016 Polyset Company, Inc. All rights reserved. Revised 8/16.